

BuzziCube 3D

Product Specification Sheet

This document contains technical information about the BuzziCube 3D Solo, Duo, Trio, Quatro



www.buzzi.space



Sound absorbing 3D pouf

A high-design pouf that is unique in its class thanks to its revolutionary form and high-tech production process. The 3D foam covered with a variety of BuzziSpace fabrics gives it a unique touch.

Design by BuzziSpace Studio

General

- 📦 BuzziCube 3D Solo, Duo, Trio, Quatro
 - Filling: Acoustic Foam
 - Cover: Acoustic 3D foam
- 🌳 Upholstered in: Fabric, Rough, Trevira CS+, Memory 2
 - Pattern: 1 SQ, 4 SQ, 16 SQ
- ☁️ Dry usage
- 🔧 Assembled

Acoustics



Absorption



Diffusion

Certifications



Content

Configurations	3
Patterns	4
Components	4
Fabrics	5
Dimensions	7
Acoustics	8

Configurations


BuzziCube 3D

- Solo | Duo | Trio | Quatro
- 3D 1 SQ | 4 SQ | 16 SQ
- Bottom: antiskid, wood or with wheels (wheels only for Solo)
- Upholstery in Fabric, Rough, Trevira CS+, Memory 2


				Antiskid	Wood	Wheels (only for Solo)
❏	Solo:	L 50 cm	W 50 cm	H 47 cm	H 50 cm	H 50 cm
		L 19.69"	W 19.69"	H 18.50"	H 19.69"	
	Duo:	L 94 cm	W 50 cm	H 47 cm	H 50 cm	
		L 37.01"	W 19.69"	H 18.50"	H 19.69"	
	Trio:	L 138 cm	W 50 cm	H 47 cm	H 50 cm	
		L 54.33"	W 19.69"	H 18.50"	H 19.69"	
	Quatro:	L 182 cm	W 50 cm	H 47 cm	H 50 cm	
		L 71.65"	W 19.69"	H 18.50"	H 19.69"	

		Antiskid		Wood		Wheels (only for Solo)
⚖	Solo:	4 kg	8.82 lbs	6 kg	13.23 lbs	Solo: 6 kg 13.23 lbs
	Duo:	7,5 kg	16.53 lbs	11,5 kg	25.35 lbs	
	Trio:	11 kg	24.25 lbs	17,5 kg	38.58 lbs	
	Quatro:	14,5 kg	31.97 lbs	22,6 kg	49.82 lbs	


Solo




Duo



Trio




Quatro

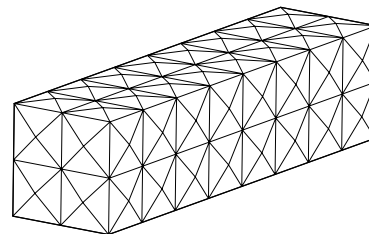


Patterns


1 SQ



4 SQ




16 SQ



Components


Bottom

Antiskid

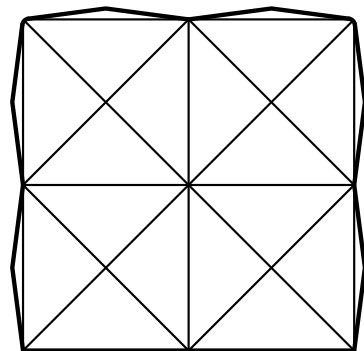


Bottom:
Antiskid

Wood

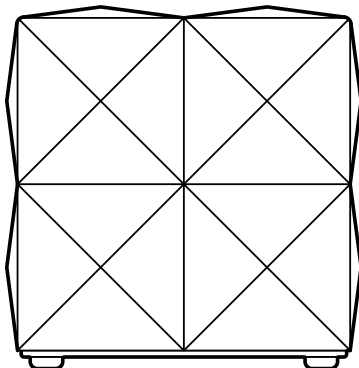

Bottom:
Black MDF
4 Plastic Feet

Wheels (only for Solo)

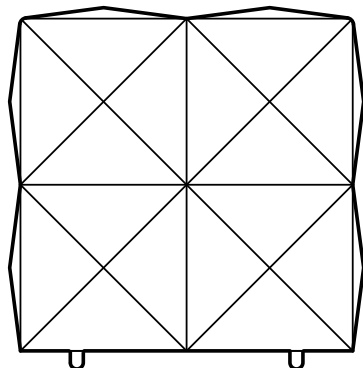


Bottom:
Poplar multiplex
MDF covered with antiskid
4 Wheels
(load capacity: 40 kg | 88.18 lbs
per wheel)



Fabrics

Fabric



Category A

Composition 70% Recycled Wool, 25% Recycled Polyacryl,
5% Recycled Other Fabrics

Weight 405 g/m² | 11.94 oz/yd²

Abrasion resistance 40.000 Martindale, 50,000 Wyzenbeek

Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).
EN 1021.2/2006 | BS EN 1021.2/2006 (match)
USA: CAL TB 117 | ASTM E84 CLASS A


Fastness to light EU: 4 | USA 4

Fastness to rubbing EU: Wet 3-4 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



Rough



Category A

Composition 100% Polyacryl

Weight 456 g/m² | 13.45 oz/yd²

Abrasion resistance 40.000 Martindale


Flammability EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette)
USA: CAL TB TB 117

Fastness to light EU: 5

Fastness to rubbing EU: Wet: 3 | Dry: 3



Trevira CS+



Category A

Weight 420 g/m² | 12.39 oz/yd²

Composition 100% Polyester, Trevira CS

Abrasion resistance 100.000 Martindale, 90,000 Wyzenbeek


Flammability BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |
IMO Res. A652 (16)

Fastness to light EU: 6 | USA 5

Fastness to rubbing EU: Wet 4-5 | Dry 4-5

Fastness to crocking USA: Wet 5 | Dry 5



**Category E****Composition** 100% Trevira CS**Weight** 700 g/lin.m**Abrasion resistance**

35.000 rubs acc. to the Martindale method, EN ISO 12947

Flammability EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

NF D 60 013 | NF P 92 507 M1 | UNI 9175 11M


UNI 9177 classe 1 | US Cal. Tech. Bull. 117

IMO A.652 (16)


Fastness to light Note 5-8, ISO 105-B02**Fastness to rubbing** (ISO) dry 4-5, wet 4-5**Pilling** Note 4, EN ISO 12945

Dimensions


Solo




Duo




Trio

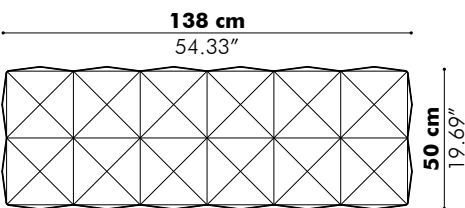


Quatro

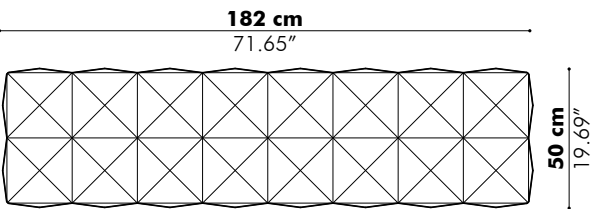


Antiskid



Wood




Wheels



Acoustics

BuzziCube 3D

Equivalent sound absorption area in m² per object

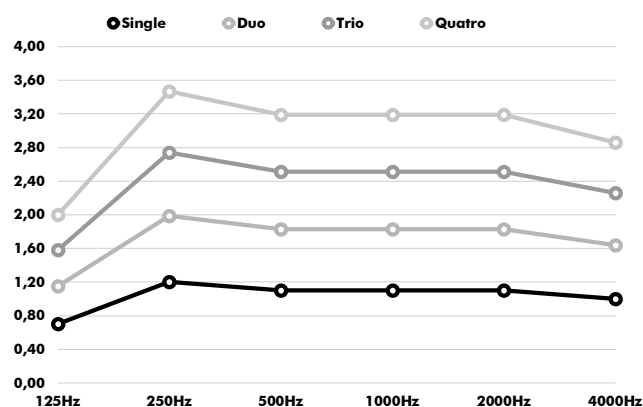

Hz	Solo Aeq/m²	Duo Aeq/m²	Trio Aeq/m²	Quatro Aeq/m²
125	0.70	1.15	1.58	2.00
250	1.20	1.99	2.74	3.47
500	1.10	1.83	2.51	3.19
1000	1.10	1.83	2.51	3.19
2000	1.10	1.83	2.51	3.19
4000	1.00	1.64	2.26	2.86