

# BuzziDesk

## Product Specification Sheet

This document contains technical information about the BuzziDesk



[www.buzzi.space](http://www.buzzi.space)

## Desk divider screen with metal profile

Not only does the BuzziDesk safeguard your privacy at work; it keeps out your colleagues' irritating telephone or computer sounds as well. This workspace divider also hides your cable clutter and computer screen in an orderly fashion. It is easy to install in any office, and with its tactile appearance and colorful tint it will make every working day feel like a party!

Design by Sas Adriaenssens

---

## General



BuzziDesk

Cover: BuzziFelt

Core: honeycomb cardboard



Profile: metal

Stitch: on Felt / Fabric: Always OffWhite (except for BuzziDesk OffWhite, Natural, Ivory → Stitch Anthracite)



Min. W 57 cm | W 22.44" H 34 cm | H 13.39"

Max. W 200 cm | W 78.74" H 80 cm | H 31.50"



Dry use



Flat Packed

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Velvet, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2



Bicolor

Rounded or straight-angled

---

## Certifications



---

## Acoustics



Absorption



Diffusion



Attenuation



Mid tone




High tone

---

## Content

Configurations	3	Dimensions	10
BuzziFix overview	5	Acoustics	14
Fabrics	7		

# Configurations

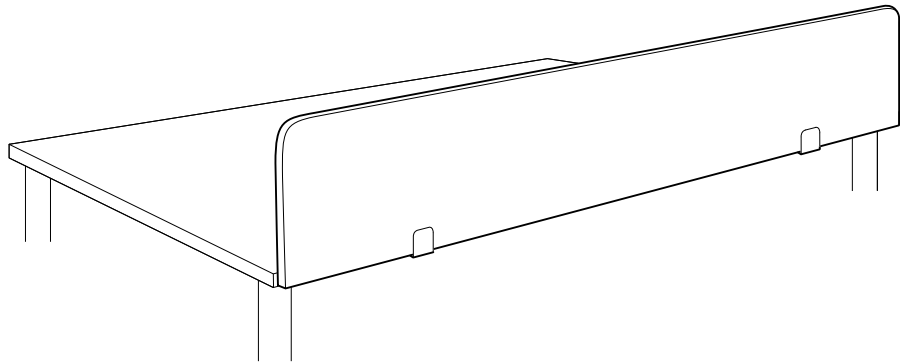

BuzziDesk

Cover: BuzziFelt

Core: honeycomb cardboard



Profile: metal

Stitch: on Felt / Fabric: Always OffWhite (except for BuzziDesk OffWhite, Natural, Ivory > Stitch Anthracite)

D: 3,5 cm | 1.38"



Min. W 57 cm | W 22.44" H 34 cm | H 13.39"

Max. W 200 cm | W 78.74" H 80 cm | H 31.50"

## Width

## Weight Profile + Weight cardboard + Felt

≥ 57 cm	< 77 cm	0,65 kg	3,30 kg/m <sup>2</sup>
≥ 22.44"	< 30.32"	1.43 lbs	0.68 lbs/ft <sup>2</sup>
≥ 77 cm	< 107 cm	0,75 kg	3,30 kg/m <sup>2</sup>
≥ 30.32"	< 42.13"	1.65 lbs	0.68 lbs/ft <sup>2</sup>
≥ 107 cm	< 137 cm	0,90 kg	3,30 kg/m <sup>2</sup>
≥ 42.13"	< 53.94"	1.98 lbs	0.68 lbs/ft <sup>2</sup>
≥ 137 cm	< 157 cm	1,15 kg	3,30 kg/m <sup>2</sup>
≥ 53.94"	< 61.81"	2.54 lbs	0.68 lbs/ft <sup>2</sup>
≥ 157 cm	< 177 cm	1,25 kg	3,30 kg/m <sup>2</sup>
≥ 61.81"	< 69.69"	2.76 lbs	0.68 lbs/ft <sup>2</sup>
≥ 177 cm	< 200 cm	1,35 kg	3,30 kg/m <sup>2</sup>
≥ 69.69"	< 78.74"	2.98 lbs	0.68 lbs/ft <sup>2</sup>



For Example:

BuzziDesk W 160 cm H 40 cm → 1,25 kg + (0,64 m<sup>2</sup> x 3,30 kg/m<sup>2</sup> = 2,11 kg) = 3,36 kg in total

BuzziDesk W 62.99" H 15.75" → 2.76 lbs + (6.89 ft<sup>2</sup> x 0.68 lbs/ft<sup>2</sup> = 4.69 lbs) = 7.45 lbs in total

Extra layer Fabric, Trevira CS, Reflect, Revive 1, Velvet, Clara 2, Remix 3, Hero 2, Tonus 4, Arda, Memory 2




Bicolor

Rounded or straight-angled

---

## Round or straight edges

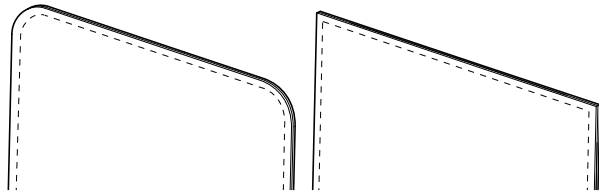

- Round or straight edges
- Stitch on Felt / Fabric: Always OffWhite (except for BuzziDesk OffWhite, Natural, Ivory → Stitch Anthracite)



# BuzziFix Overview

BuzziFix is available in powder coated metal Black (RAL 9005) or White (RAL 9010)


Use 2 pcs/BuzziDesk except for BuzziFix Foot: 1 pc/BuzziDesk

Thin: 0,3 cm | 0.12" metal thickness

## Thin F L | F L-Plus | F XL


**L**

Worktop: 12 > 27 mm  
0.47" > 1.06"




**L-Plus**

Worktop: 18 > 43 mm  
0.71" > 1.69"



**XL**

Worktop: 28 > 57 mm  
1.10" > 2.24"



## Thin Y L | L-plus | XL


**L**

Worktop: 12 > 27 mm  
0.47" > 1.06"





**L-Plus**

Worktop: 18 > 43 mm  
0.71" > 1.69"





**XL**

Worktop: 28 > 57 mm  
1.10" > 2.24"





## Thin U

Excl. screws

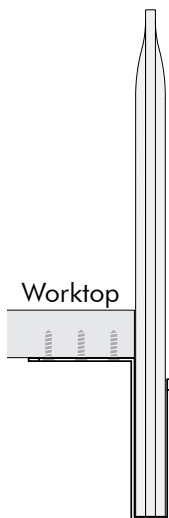


## Twin Light

Worktop: Max. 30 mm  
1.18"

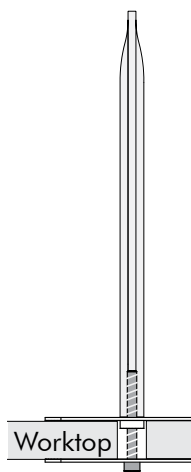


---

## Magnet Bold

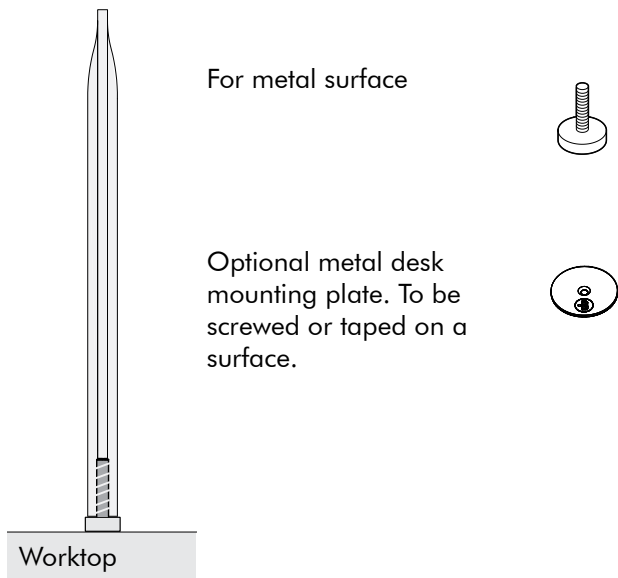


## Foot

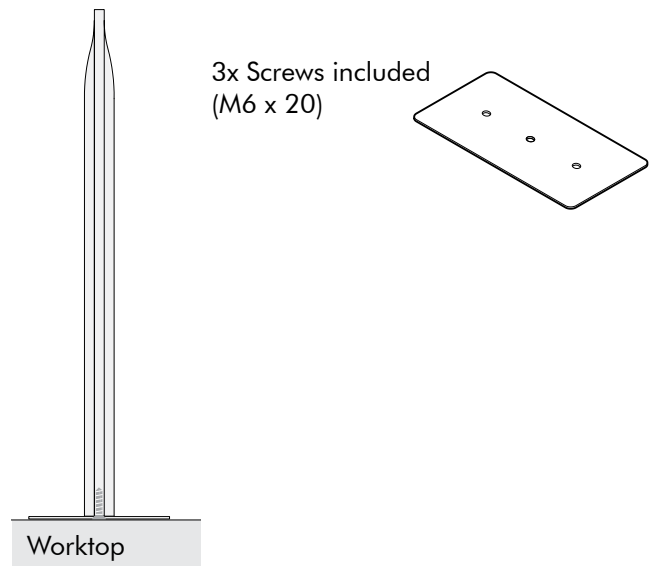

Magnet & Foot only to be used for BuzziDesk: H ≤ 40 cm | 15.75" and W ≤ 160 cm | 62.99"

# Fabrics


## Felt (12 colors)



**Composition** 100% Recycled PE.T. Felt, latex backing  
**Weight** 1.000 g/m<sup>2</sup> | 29.49 oz/yd<sup>2</sup>  
**Abrasion resistance** >7.000 Martindale  
**Flammability** EU: EN 13501.1 + A1/2009 Class B-s1,d0  
USA: ASTM E84 Class A certified  
**Fastness to light** USA 5




## Fabric (45 colors)



**Category A**  
**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics  
**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>  
**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek  
**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).  
EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
USA: CAL TB 117 | ASTM E84 CLASS A  
**Fastness to light** EU: 4 | USA 4  
**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5  
**Fastness to crocking** USA: Wet 5 | Dry 5



## Trevira CS (47 colors)




**Category A**  
**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>  
**Composition** 100% Polyester, Trevira CS  
**Abrasion resistance** 100.000 Martindale, 90,000 Wyzenbeek  
**Flammability** BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard  
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |  
IMO Res. A652 (16)  
**Fastness to light** EU: 6 | USA 5  
**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5  
**Fastness to crocking** USA: Wet 5 | Dry 5



## Reflect (34 colors)

kvadrat



### Category A

**Weight** 430 g/m<sup>2</sup> | 13.78 oz/yd<sup>2</sup>

**Composition** 100% Post-consumer recycled polyester

**Abrasion resistance** 100.000 Martindale

**Flammability** AS/NZS 3837 class 1 | ASTM E84 Class A Unadhered

ASTM E84 Class B Adhered | BS 5852 crib 5 with treatment

BS 5852 part 1 with treatment | EN 1021-1/2 | US Cal. Bull. 117-2013

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** EU: Wet 5-5 | Dry 5-5

**Pilling** Note 4, EN ISO 12945



## Revive 1 (25 colors)

kvadrat



### Category A

**Composition** 100% recycled polyester FR

**Weight** 430 g/lin.m

**Abrasion resistance** 60.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1

UNI 9175 1IM | US Cal. Tech. Bull. 117

IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 5, wet 4-5

**Pilling** Note 4-5, EN ISO 12945



## Velvet (12 colors)

### Category A

**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>

**Composition** 100% Polyester, Trevira CS

**Abrasion resistance** 100.000 Martindale, 90,000 Wyzenbeek

**Flammability** BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard

USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |

IMO Res. A652 (16)

**Fastness to light** EU: 6 | USA 5


**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Clara 2 (24 colors)

kvadrat



### Category B

**Composition** 92% new wool, 8% nylon

**Weight** 400 g/lin.m

**Abrasion resistance** 80.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2

NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E

NFPA 260 | IMO A.652(16)

**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945





## Remix 3 (73 colors)

kvadrat



**Category B**

**Composition** 90% new wool, 10% nylon

**Weight** 415 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1

Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM

AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013

NFPA 260 | IMO FTP Code 2010:Part 8

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Hero 2 (33 colors)

kvadrat



**Category C**

**Composition** 97% new wool, 3% nylon

**Weight** 580 g/lin.m

**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013

UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260

IMO A.652 (16)

**Fastness to light** Note 5-6, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 3-4, EN ISO 12945



## Tonus 4 (47 colors)

kvadrat



**Category D**

**Composition** 90% new wool, 10% Helanca

**Weight** 665 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2

Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM

US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 3-5, wet 3-5

**Pilling** Note 3, EN ISO 12945



## Arda (12 colors)

kvadrat



### Category E

**Composition** 70% new wool 21% polyester 9% nylon

**Weight** 800 g/lin. m | 25.8 oz/ly

### Abrasion resistance

Approx. 50.000 Martindale rubs, EN ISO 12947

**Flammability** ASTM E84 Class A Unadhered | AS/NZS 3837 class 2 | BS 5852 part 1  
BS 5852 crib 5 | DIN 4102 B2 | EN 1021-1/2 | IMO FTP Code 2010 Part 8  
UNI 9175 1IM | US Cal. Bull. 117-2013

**Fastness to light** Note 5-8, ISO 105-B02


**Fastness to rubbing** Dry note 3-5 ISO 105-X12  
Wet note 3-5 ISO 105-X12

**Pilling** Note 4, EN ISO 12945



## Memory 2 (20 colors)

kvadrat



### Category E

**Composition** 100% Trevira CS

**Weight** 700 g/lin.m

### Abrasion resistance

35.000 rubs acc. to the Martindale method, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM  
UNI 9177 classe 1 | US Cal. Tech. Bull. 117  
IMO A.652 (16)

**Fastness to light** Note 5-8, ISO 105-B02



**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 4, EN ISO 12945




# Dimensions


## Desk

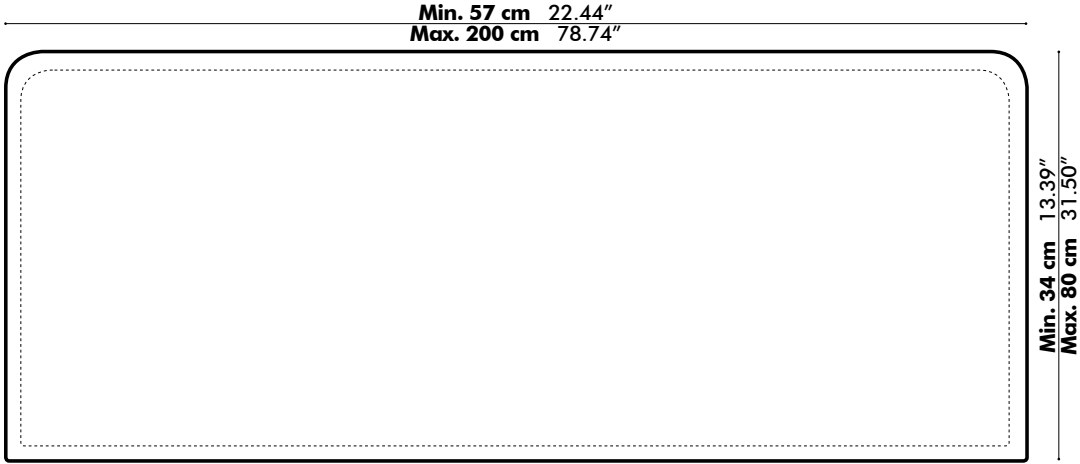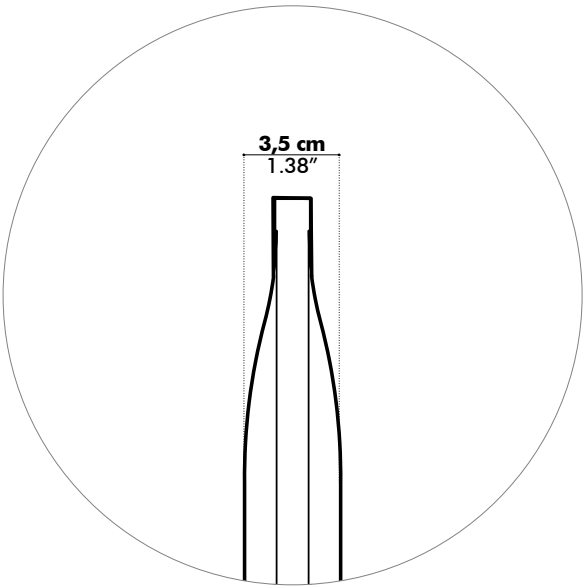


# Profiles

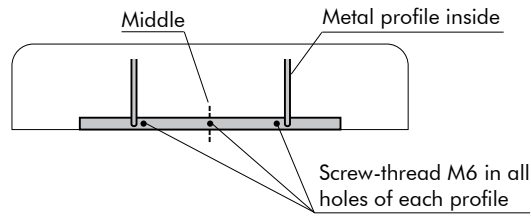


BuzziDesk  
 $W: \geq 57 \text{ cm} < 77 \text{ cm}$   
 $W: \geq 22.44'' < 30.31''$

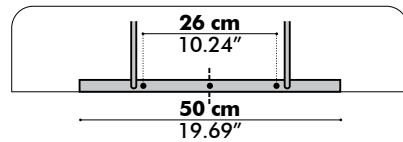


BuzziDesk  
 $W: \geq 77 \text{ cm} < 107 \text{ cm}$   
 $W: \geq 30.31'' < 42.13''$

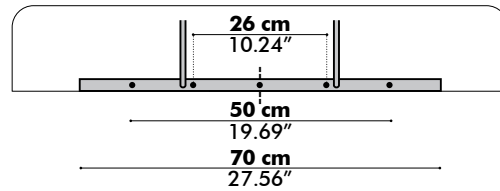


BuzziDesk  
 $W: \geq 107 \text{ cm} < 137 \text{ cm}$   
 $W: \geq 42.13'' < 53.94''$

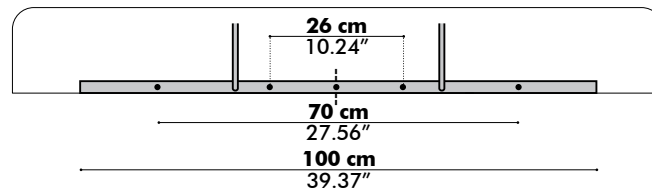


BuzziDesk  
 $W: \geq 137 \text{ cm} < 157 \text{ cm}$   
 $W: \geq 53.94'' < 61.81''$

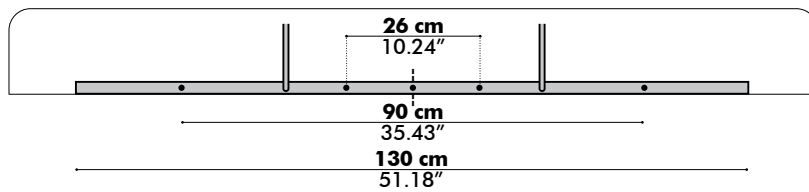

BuzziDesk  
 $W: \geq 157 \text{ cm} < 177 \text{ cm}$   
 $W: \geq 61.81'' < 69.69''$

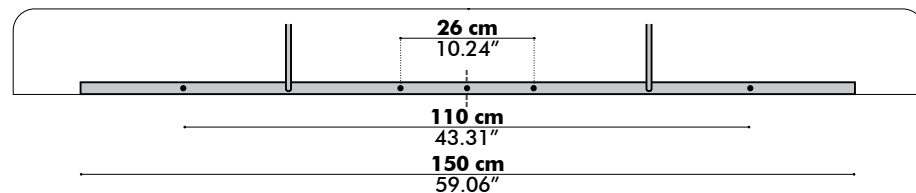


BuzziDesk  
 $W: \geq 177 \text{ cm} < 200 \text{ cm}$   
 $W: \geq 69.69'' < 78.74''$

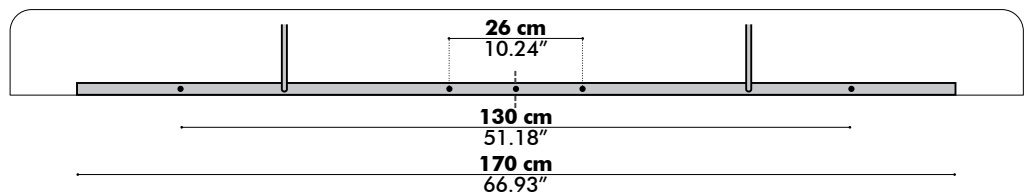

# BuzziFix


**Thin** (metal thickness 0,3 cm | 0.12")

## F L

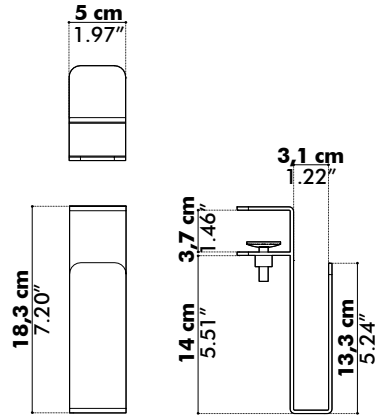


540 g/pc | 1.19 lbs/pc

## F L-Plus

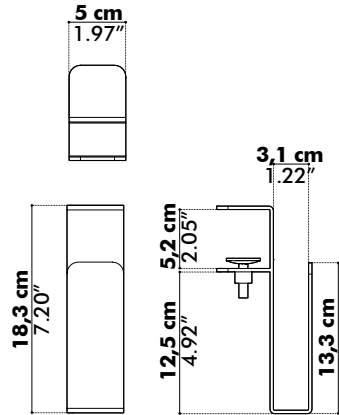

540 g/pc | 1.19 lbs/pc


## F XL

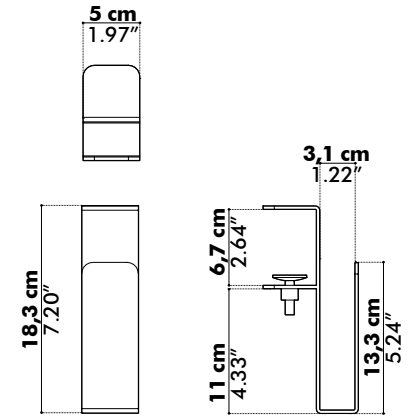

540 g/pc | 1.19 lbs/pc


**Thin** (metal thickness 3 mm)

## Y L




315 g/pc | 0.69 lbs/pc

## Y L-Plus



325 g/pc | 0.72 lbs/pc


## XL

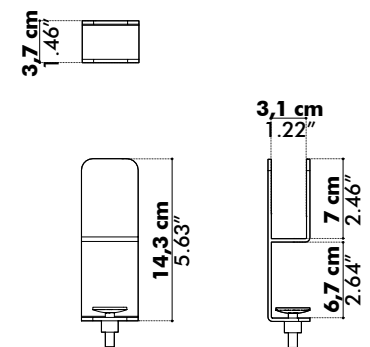

350 g/pc | 0.77 lbs/pc

**Thin** (metal thickness 0,3 cm | 0.12")


## U

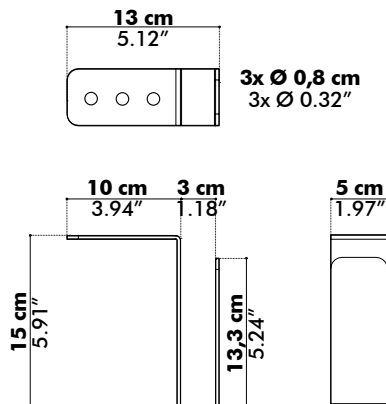

475 g/pc | 1.05 lbs/pc

**Thin** (metal thickness 0,2 cm | 0,07")



## Twin

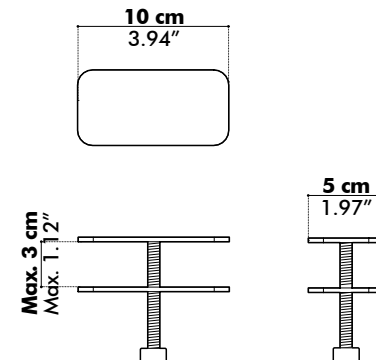

170 g/pc | 0.38 lbs/pc





**Magnet**




 46 g/pc | 0.10 lbs/pc

**Optional mounting plate for Magnet**



 30 g/pc | 0.07 lbs/pc

**Thin Foot**

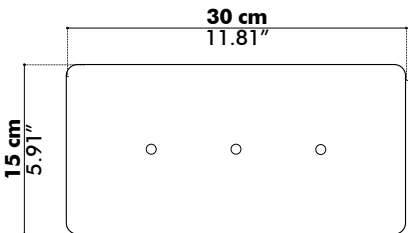


 1600 g/pc | 3.53 lbs/pc

# Acoustics

## BuzziDesk

Equivalent sound absorption area in m<sup>2</sup> per object

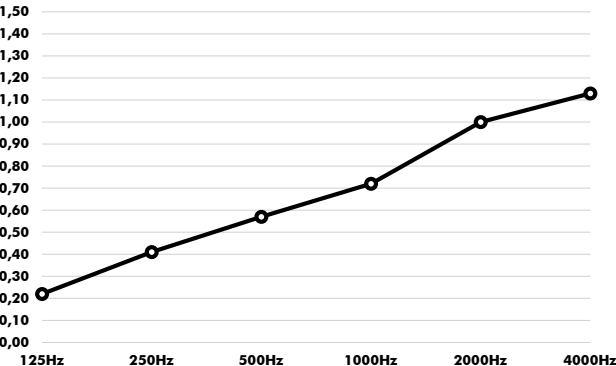

Hz	Aeq/m²
125	0,22
250	0,41
500	0,57
1000	0,72
2000	1
4000	1,13